

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 225 690 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
24.07.2002 Bulletin 2002/30

(51) Int Cl.7: H03F 1/32

(21) Application number: 01310612.5

(22) Date of filing: 19.12.2001

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• Midtgaard, Jacob
3480 Fredensborg (DK)
• Bagger, Oluf
1722 Copenhagen V (DK)

(30) Priority: 22.12.2000 GB 0031550

(74) Representative: Walaski, Jan Filip et al
Venner, Shipley & Co,
20 Little Britain
London EC1A 7DH (GB)

(71) Applicant: Nokia Corporation
02150 Espoo (FI)

(54) Transmitter circuits

(57) A polar loop transmitter includes separate phase and envelope paths providing a linearising scheme for an efficient non-linear power amplifier. Loop filters are included in each of the phase and envelope paths to enable the path characteristics to be matched to one another. A polar loop transmitter and other types of envelope elimination and restoration transmitters control the output envelope of the power amplifier by connecting the output of the envelope detector, or in an

envelope feedback transmitter, the envelope error signal, to the bias control input of the power amplifier. The transmitter can further include compensation means for compensating for non-linearities in the envelope control means and a loss of feedback control detector to ensure that the feedback signal remains within acceptable limits.

EP 1 225 690 A2

Description

[0001] The present invention relates to transmitter circuits, particularly but not exclusively to power amplifier linearising circuits such as envelope elimination and restoration transmitters and polar loop transmitters for use in portable communications devices such as mobile telephones.

[0002] The present trend in portable communications devices such as mobile telephones is to increasingly lightweight devices with increased talk-time between battery recharge cycles. Such developments require ever more efficient radio-frequency (RF) amplifiers to minimise power consumption. In cellular systems such as GSM, the modulation scheme is a constant amplitude scheme, also referred to as constant envelope modulation, which permits use of efficient non-linear amplifiers. However, recent types of communication system such as EDGE and UMTS use non-constant envelope modulation schemes. The drawback is that the amplification of non-constant envelope RF signals requires the use of linear power amplifiers, which are inherently less efficient. The lower power efficiency of linear amplifiers translates into higher power consumption and higher heat dissipation.

[0003] A variety of linearisation architectures and schemes exist, including fixed and adaptive pre-distortion, adaptive bias, envelope elimination and restoration, polar loop and cartesian loop transmitters. Details of such devices are shown in "Increasing Talk-Time with Efficient Linear PA's", IEE Seminar on TETRA Market and Technology Developments, Mann S, Beach M, Warr P and McGeehan J, Institution of Electrical Engineers, 2000, which is incorporated herein by reference. However, many of these devices and techniques are unsuitable for battery operated portable devices such as mobile telephones, or are incapable of meeting current RF design standards, such as the TETRA linearity standard, ETSI publication ETS 300 396-2; "Trans-European Trunked Radio (TETRA); - Voice plus Data (V+D) - Part 2: Air Interface (AI)"; March 1996.

[0004] Envelope elimination and restoration (EER) transmitters separate envelope and phase information from an input modulated signal. The phase information is then passed through a power amplifier as a constant envelope signal, permitting the use of efficient, non-linear amplifiers, while the envelope signal is added to the power amplifier output. Such circuits suffer from the inherent problem that the phase and envelope information propagates through separate paths, which introduces different delays on the phase and envelope components before they are combined again at the output of the transmitter. This leads to distortion of the modulation.

[0005] According to a first aspect of the invention, there is provided a polar loop transmitter comprising an envelope loop, a phase loop and means disposed within each of the phase and envelope loops configured to match the transfer characteristics of the phase and en-

velope loops. The matching means can comprise a loop filter in each of the phase and envelope loops. Each loop filter can be configured so that the transfer characteristics of the phase and envelope loops are matched over an operating frequency range of the transmitter circuit. For example, each loop filter can be configured so that the phase and envelope loops are of the same type and have substantially the same bandwidth and loop damping.

[0006] The envelope loop can include envelope control means for the output signal from a power amplifier which forms part of the polar loop transmitter circuit. The envelope control means can comprise a power supply modulator arranged to modulate the voltage supply of the power amplifier or can be implemented by the connection of an envelope detector to a bias control input of the power amplifier.

[0007] The polar loop transmitter according to the first aspect of the invention can further comprise compensation means disposed in the envelope loop for compensating for non-linearities in the envelope control means. It can further comprise a detector configured to detect loss of feedback control.

[0008] According to a first aspect of the invention, there is further provided a polar loop transmitter comprising a power amplifier for amplifying an input signal having input phase and envelope components to produce an output signal having output phase and envelope components, an envelope loop including elements configured to produce an envelope difference signal representative of the difference between the input and output envelope components, said envelope loop having a loop transfer characteristic, a phase loop including elements configured to produce a phase difference signal representative of the difference between the input and output phase components, said phase loop having a loop transfer characteristic and elements disposed within each of the phase and envelope loops configured to match the transfer characteristics of the phase and envelope loops.

[0009] According to a second aspect of the invention, there is provided an envelope elimination and restoration transmitter including a power amplifier having a bias control input, wherein the transmitter includes an envelope detector for detecting the envelope of an input signal and the output of the envelope detector is connected to the bias control input of the amplifier to control the output signal envelope.

[0010] By removing the need for a power supply modulator, the switching noise and limited efficiency associated with such modulators is removed. In addition, cost savings can be achieved, while creating EER transmitters with improved efficiency for linear modulation schemes.

[0011] The transmitter according to the second aspect can further comprise a slow power supply modulator configured to modulate the supply voltage to the power amplifier. The transmitter according to this aspect

of the invention can include pre-distortion or envelope feedback to make the transmitter linear. Different solutions for the phase path such as offset loop and direct fractional synthesis can also be included.

[0012] According to a third aspect of the invention, there is provided an envelope feedback transmitter including a power amplifier operable to provide an output signal, means for controlling the envelope of the output signal and compensation means for compensating for non-linear characteristics of the envelope control means.

[0013] By combining rough and non-critical direct gain compensation with envelope feedback, high linearisation of the amplifier envelope transfer function can be achieved. This aspect of the invention can also be combined with any suitable solution for the phase path such as an offset loop or a direct fractional synthesis.

[0014] The envelope control means can comprise a modulator for modulating the voltage supply of the power amplifier. Alternatively, the feedback transmitter can further comprise means for providing a difference signal representative of the difference between input and output envelope components, wherein the difference signal is connected to a bias control input of the power amplifier to provide the envelope control means. The difference signal can be connected to the bias control input of the power amplifier via a loop filter.

[0015] The difference signal providing means can comprise a comparator arranged to receive signals from first and second envelope detectors for detecting the input and output envelope components respectively.

[0016] The compensation means is disposed between the output of the amplifier and the input to the comparator. The compensation means can comprise first and second compensation elements, the first compensation element being disposed between the first envelope detector and a first input to the comparator and the second compensation element being disposed between the second envelope detector and a second input to the comparator. The first and second compensation elements can be configured to have a large signal transfer function which approximates to the inverse of the large signal transfer function of the envelope control means.

[0017] The compensation means can also be disposed between the output of the comparator and the envelope control means. In this case, the compensation means can comprise a compensation element having a linear transfer function with variable gain and a non-linear gain control. The non-linear gain control can be connected to the output of either one of the first and second envelope detectors.

[0018] According to a fourth aspect of the invention, there is provided a feedback transmitter having means for providing a difference signal representative of the difference between input and feedback signals, comprising a detector configured to detect a loss of feedback control when the difference signal exceeds a predetermined

threshold.

[0019] The feedback amplifier can be an envelope elimination and restoration transmitter, in which the detector comprises an amplitude detector configured to detect a loss of feedback control when the amplitude of the envelope error exceeds a predetermined threshold.

[0020] The feedback amplifier can further comprise a power amplifier for amplifying an input signal having input phase and envelope components to produce an output signal having output phase and envelope components and an envelope loop including elements configured to produce an envelope difference signal representative of the difference between the input and output envelope components, wherein the amplitude detector is configured to monitor the difference signal.

[0021] The feedback amplifier can also comprise a comparator for producing the difference signal, the comparator being configured to receive output signals from first and second envelope detectors.

[0022] The feedback amplifier can alternatively be a Cartesian transmitter in which the difference signal is representative of the difference between in-phase I input and feedback signals or quaternary Q input and feedback signals.

[0023] By detecting and acting on the loss of feedback control, the use of a circulator, or isolator, between the amplifier and impedance load is rendered unnecessary, so increasing efficiency and saving on cost.

[0024] According to the fourth aspect of the invention, there is further provided a method of detecting a loss of loop control in a feedback transmitter providing a difference signal representative of the difference between input and output signal components, comprising monitoring the difference signal and detecting a difference signal deviation greater than a predefined threshold.

[0025] The input and output signal components can comprise signal envelope components. The step of detecting a difference signal deviation can comprise detecting a difference signal amplitude greater than a predefined threshold.

[0026] The method can further include averaging the difference signal.

[0027] Embodiments of the invention will now be described by way of example with reference to the accompanying drawings, in which:

Figure 1 is a perspective view of a mobile telephone handset;

Figure 2 is a schematic diagram of mobile telephone circuitry for use in the telephone handset of Figure 1;

Figure 3 illustrates the basic principle of an envelope elimination and restoration transmitter (EER); Figure 4 shows an envelope feedback transmitter; Figure 5 shows a polar loop transmitter in accordance with the invention;

Figure 6 is a schematic diagram of an EER transmitter using a bias input of a power amplifier in ac-

cordance with a second aspect of the invention;
 Figure 7 is a schematic diagram of the transmitter of Figure 6 with the addition of a slow modulator;
 Figure 8 is a schematic diagram of a first arrangement of an envelope feedback transmitter in accordance with a third aspect of the invention;
 Figure 9 is a schematic diagram of a second arrangement of an envelope feedback transmitter in accordance with a third aspect of the invention;
 Figure 10 is a schematic diagram of the envelope feedback transmitter of Figure 8 with the addition of a phase offset loop;
 Figure 11 is a schematic diagram of an envelope feedback transmitter with loss of feedback control detection according to a fourth aspect of the invention; and
 Figure 12 is a flowchart illustrating the operation of the transmitter of Figure 11.

[0028] Referring to Figure 1, a mobile station in the form of a mobile telephone handset 1 includes a microphone 2, keypad 3, with soft keys 4 which can be programmed to perform different functions, an LCD display 5, a speaker 6 and an antenna 7 which is contained within the housing.

[0029] The mobile station 1 is operable to communicate through cellular radio links with individual public land mobile networks (PLMNs) operating according to communication schemes such as UMTS and EDGE.

[0030] Figure 2 illustrates the major circuit components of the telephone handset 1. Signal processing is carried out under the control of a digital micro-controller 9 which has an associated flash memory 10. Electrical analogue audio signals are produced by microphone 2 and amplified by pre-amplifier 11. Similarly, analogue audio signals are fed to the speaker 6 through an amplifier 12. The micro-controller 9 receives instruction signals from the keypad and soft keys 3, 4 and controls operation of the LCD display 5.

[0031] Information concerning the identity of the user is held on a smart card 13 in the form of a GSM SIM card which contains the usual GSM international mobile subscriber identity (IMSI) and an encryption key K_i that is used for encoding the radio transmission in a manner well known per se. The SIM card is removably received in a SIM card reader 14.

[0032] The mobile telephone circuitry includes a codec 15 and an rf stage 16 including a power amplifier stage 17 feeding the antenna 7. The codec 15 receives analogue signals from the microphone amplifier 11, digitises them into an appropriate signal format and feeds them to the power amplifier stage 17 in the rf stage 16 for transmission through the antenna 7 to the PLMN shown in Figure 1. Similarly, signals received from the PLMN are fed through the antenna 7 to be demodulated in the rf stage 16 and fed to codec 15, so as to produce analogue signals fed to the amplifier 12 and speaker 6.

[0033] Referring to Figure 3, the power amplifier stage

17 comprises an envelope elimination and restoration (EER) transmitter 18 which separates the envelope and phase components of an input modulated RF signal into two separate paths 19, 20. The envelope path 19 includes an envelope detector 21 which extracts amplitude information from the RF input signal and an envelope controller 22 connected to a power amplifier 23. The phase path 20 includes a limiter 24 which eliminates the input signal envelope to generate a constant amplitude phase signal. The phase signal output of the limiter is fed to an RF input of the amplifier 23 via a variable delay module 25, while the amplitude information is used to control the output envelope via the envelope controller 22. The amplitude and phase information are therefore recombined via the power amplifier 23 to produce the RF output for the antenna 7. The envelope controller 22 is for example a fast power supply modulator which directly modulates the supply voltage of the power amplifier 23. The purpose of the delay module 25 is to compensate for the difference between envelope and phase path delays. However, this solution changes the loop characteristics and stability making it difficult to control. This is especially the case if a high bandwidth is needed for wideband modulation schemes such as the 8-PSK modulation used in EDGE, since the insertion of a delay can only match the loop transfer functions over a relatively narrow frequency band. Furthermore, it is difficult to ensure that the delay tracks loop changes with temperature and other variable conditions.

[0034] The addition of envelope feedback to the circuit of Figure 3 leads to an envelope feedback transmitter 26, shown in Figure 4. In general terms, the envelope feedback transmitter 26 works by comparing the output envelope with the input envelope and using the difference signal to control a power amplifier, thereby providing improved linearity. The envelope loop of the envelope feedback transmitter 26 comprises first and second envelope detectors 27, 28, the respective outputs of which are fed to the respective inputs of a comparator 29. The output of the comparator 29 is fed to a loop filter 30 and then via an envelope controller 31 to a voltage supply terminal 32 of a power amplifier 33. The phase loop of the envelope feedback transmitter is shown in its simplest form as comprising a limiter 34 which is fed with the RF input signal and has its output connected to an RF input 35 of the power amplifier 33. Since envelope feedback on its own does not correct AM-PM distortion, phase feedback is added to the circuit of Figure 4 to provide an improved transmitter known as a polar loop transmitter or polar feedback transmitter 36, as shown in Figure 5.

[0035] As well as comparing the input and output envelopes, the polar feedback transmitter compares the phases of the input and output signals and uses the resulting phase error to drive a voltage controlled oscillator.

[0036] As described above in relation to Figure 4, the envelope loop of the polar feedback transmitter 36 of

Figure 5 comprises first and second envelope detectors 27, 28, the respective outputs of which are fed to the respective inputs of the comparator 29. The output of the comparator 29 is fed to a first loop filter 30 and then via the envelope controller 31 to the voltage supply terminal 32 of the power amplifier 33. As mentioned above, the envelope controller 31 is, for example, a switching power supply which directly modulates the supply voltage of a switched mode power amplifier 33. The phase loop of the transmitter 36 comprises first and second limiters 37, 38 for producing a constant amplitude phase signal and a phase detector 39 for deriving a difference signal from the outputs of the limiters 37, 38. The output of the phase detector 39 is fed via a second loop filter 40 to a voltage controlled oscillator (VCO) 41, and then fed to an RF input 42 of the power amplifier 33. The output of the power amplifier 33 is mixed with a local oscillator signal 43 at a mixer 44 to shift the carrier frequency to an intermediate frequency and fed back through a low pass filter 45 as an input to the first envelope detector 27 and the second limiter 38. The purpose of the low pass filter 45 is to remove sideband components and local oscillator leakage from the mixed signal. The inputs to the second envelope detector 28 and the first limiter 37 are provided by the RF input signal.

[0037] The first and second loop filters 30, 40 are configured so that the loop characteristics of the phase and envelope loops are the same or very similar, with respect to both phase delay and gain, over the range of operating frequencies of the transmitter circuit. For example, both are type II loops with two poles at zero and both have the same bandwidth and loop damping. This results in similar group delays in the two loops, limiting the delay difference between the phase and envelope components.

[0038] In a second aspect of the invention illustrated in Figure 6, a power supply modulator is not used to control the power supply of the power amplifier. The EER transmitter 46 comprises an envelope detector 47 which receives the input signal, the output of which is connected to the bias control input 48 of a power amplifier 49. In traditional non-EER transmitters, the bias control input is used to set the transmitter power level, while any envelope information is contained in the normal RF input signal to the power amplifier. In the phase loop, the input signal is connected via a limiter 50 to the RF input 51 of the amplifier 49. Comparing this circuit with the circuit of Figure 3, it is apparent that this configuration obviates the need for a separate envelope controller.

[0039] While described above with reference to Figure 6, the invention can be implemented in any EER transmitter architecture, including different solutions for the phase path such as offset loop and direct fractional synthesis. The transfer function for the bias control input to power amplifier envelope is generally non-linear. To make the transmitter linear, either pre-distortion or envelope feedback can be used. For example, the envelope controller 31 in Figures 4 and 5 can be omitted by

using a bias control input on the power amplifier 33.

[0040] Referring to Figure 7, this aspect of the invention can be combined with a slow power supply modulator 52, which has less switching noise problems than a fast power supply modulator and which can be implemented with higher efficiency. The modulator 52 is connected to a supply voltage terminal 53 of the power amplifier 49 and is used to set an optimum power supply voltage for a given output power level, while the bias control arrangement 47, 48 according to the second aspect handles the envelope variation due to modulation.

[0041] In a third aspect of the invention, compensation elements are added to EER circuits to compensate for non-linearities in the amplifier envelope control means.

[0042] Amplifier envelope control can be achieved using a variety of techniques, for example direct modulation of the amplifier supply voltage using a switched mode power supply or regulator, by controlling the bias conditions of the amplifier as described in relation to the second aspect above, by adding a variable gain amplifier on the input of the main amplifier or any combination of these.

[0043] Referring back to the circuit of Figure 4, a compensation element can be added in two different places within the envelope loop. The first is between the output of the amplifier 33 and the input to the comparator 29, which requires a corresponding compensation element in the input path. The second is between the comparator 29 and the amplifier envelope control mechanism 31.

[0044] Figures 8 and 9 illustrate one way to place the compensating elements 55, 56, 57. The element referencing has been retained from that of Figure 4 and the description of the overall circuit operation is the same. The compensation elements 55, 56 in the circuit of Figure 8 are designed to have a large signal transfer function which approximates to the inverse of the envelope controller large signal transfer function. The compensation element 57 in the circuit of Figure 9 is designed to have a linear transfer function using a variable gain amplifier 58 and a non-linear gain control 59. The gain in the compensation element 57 is then controlled by feeding the envelope information from one of the envelope detectors 28 forward to the gain control input of the compensation element. The non-linearity in the gain control 59 approximates to the inverse of the first derivative of the large signal transfer function of the envelope controller, or, in other words, approximates to the inverse of the envelope controller small signal gain as a function of the required envelope.

[0045] The exact shape of the non-linearity used to compensate the amplifier envelope control transfer function is not critical. It can, for example, be a piecewise linear characteristic, be comprised of exponential, linear and logarithmic segments, or hyperbolic tangent segments. The principle is to keep the resulting loop gain within boundaries, for example in the range 1:3 to 1:15, being the ratio between minimum and maximum loop

gain over the modulation envelope variation, that allow the loop to compensate the remaining non-linearities without excessive requirements on loop gain and without excessive variation in loop characteristics as a result of the non-linearities.

[0046] The phase signal for this aspect of the invention can be generated in any way that is suitable for the specific modulation and system. Examples are an offset loop as shown in Figure 10 and direct synthesis of the phase modulated RF signal using a fractional synthesis. The elements of Figure 10 correspond to those shown and described in relation to Figure 5, with the addition of the compensation element 57.

[0047] In normal operation, the output signal of the comparator in the envelope loop of an envelope feedback amplifier has a limited amplitude. However, the signal increases significantly in amplitude if the amplifier output envelope does not follow the input signal amplitude, for example due to clipping or saturation of the amplifier output stage, resulting in loss of feedback control. Clipping or saturation can occur as a result of an impedance mismatch and reflections caused, for example, by changes in the impedance of the antenna to which the amplifier output is connected.

[0048] Figure 11 shows the EER transmitter of Figure 4, with the addition of an amplitude detector 60 at the output of the comparator 29 in the envelope loop. All of the other elements shown and the general operation of the circuit are described above with reference to Figure 4. The operation of the detector 60 is described below with reference to the flowchart in Figure 12. A detection threshold is first set (step s1). This is set to be above the normal expected signal amplitude. The output of the comparator 29 is then continuously monitored (step s2) and the output averaged over a given period (step s3), to avoid detection of spurious amplitude spikes. If a loss of loop control is detected by the averaged comparator output signal exceeding the threshold for a given period (step s4), appropriate action is taken to remedy the problem (step s5).

[0049] The action to be taken depends on the cause of the loss of control. For example, if this is due to clipping or saturation in the amplifier output stage, the output power is lowered, avoiding modulation distortion at the cost of lower transmitted power. The loss of control detection can also be used to change the bias conditions or power supply of the amplifier, enabling it to cope with changes in load impedance. Modulation distortion can then be avoided while output power is maintained, at the possible cost of additional power consumption in the amplifier.

[0050] Detection can also be carried out at later stages in the forward envelope path, for example at nodes in the loop filter, or at any point at which the signal used for detection represents the envelope error and not the actual envelope.

[0051] While it has been described with respect to an envelope feedback amplifier, this aspect of the invention

can also be used in other types of transmitter circuit, including a Cartesian feedback transmitter where detection can be done on the in-phase I or quaternary Q signal components. I and Q signals are generated in the feedback loop using a quadrature demodulator and compared directly to the wanted I and Q signals. The error signal from this comparison can be used to detect loss of control, in the same way as the error signal from the amplitude comparison in the polar loop architecture.

[0052] It will be understood that instead of separating the envelope and phase components in the input signal by envelope detection and limiting, as shown in the accompanying figures, the input signal can be directly supplied as polar phase and envelope components.

Claims

1. A polar loop transmitter, comprising:
 - an envelope loop;
 - a phase loop; and
 - means disposed within each of the phase and envelope loops configured to match the transfer characteristics of the phase and envelope loops.
2. A polar loop transmitter according to claim 1, wherein said matching means comprise a loop filter in each of the phase and envelope loops.
3. A polar loop transmitter according to claim 2, operable over an operating frequency range, wherein each loop filter is configured so that the transfer characteristics of the phase and envelope loops are matched over the operating frequency range.
4. A polar loop transmitter according to claim 2 or 3, wherein each loop filter is configured so that the phase and envelope loops are of the same type and have substantially the same bandwidth and loop damping.
5. A polar loop transmitter according to any one of the preceding claims, including a power amplifier for providing an output signal, wherein the envelope loop includes envelope control means for the output signal.
6. A polar loop transmitter according to claim 5, wherein the envelope control means includes a power supply modulator arranged to modulate the voltage supply of the power amplifier.
7. A polar loop transmitter according to claim 5 or 6, wherein the envelope loop includes an envelope detector.

8. A polar loop transmitter according to claim 7, wherein the envelope detector is connected to a bias control input of the power amplifier, whereby to provide the envelope control means.
9. A polar loop transmitter according to any one of claims 5 to 8, further comprising compensation means disposed in the envelope loop for compensating for non-linearities in the envelope control means.
10. A polar loop transmitter according to any one of claims 5 to 9, comprising first and second envelope detectors for detecting input and output envelopes respectively and means for providing a difference signal representative of the difference between the input and output envelopes.
11. A polar transmitter according to claim 10, wherein said difference signal providing means comprises a comparator.
12. A polar loop transmitter according to claim 10 or 11, further comprising a detector configured to detect loss of feedback control.
13. A polar loop transmitter according to claim 12, wherein the detector is operative on the difference signal.
14. A polar loop transmitter comprising:
- a power amplifier for amplifying an input signal having input phase and envelope components to produce an output signal having output phase and envelope components;
 - an envelope loop including elements configured to produce an envelope difference signal representative of the difference between the input and output envelope components, said envelope loop having a loop transfer characteristic;
 - a phase loop including elements configured to produce a phase difference signal representative of the difference between the input and output phase components, said phase loop having a loop transfer characteristic; and
 - elements disposed within each of the phase and envelope loops configured to match the transfer characteristics of the phase and envelope loops.
15. A portable communications device including a polar loop transmitter according to any one of claims 1 to 14.
16. An envelope elimination and restoration transmitter including a power amplifier having a bias control input, wherein the transmitter includes an envelope detector for detecting the envelope of an input signal and the output of the envelope detector is connected to the bias control input of the amplifier to control the output signal envelope.
17. An envelope elimination and restoration transmitter according to claim 16, further comprising a slow power supply modulator configured to modulate the supply voltage to the power amplifier.
18. An envelope elimination and restoration transmitter according to claim 16 or 17, configured so as to linearise the transmitter.
19. An envelope elimination and restoration transmitter according to claim 18, wherein the linearising configuration includes an envelope feedback loop.
20. An envelope elimination and restoration transmitter according to claim 19, further comprising a phase feedback loop.
21. An envelope elimination and restoration transmitter according to claim 18, including means for generating pre-distorted signals whereby to provide a linearising configuration.
22. A portable communications device including a polar loop transmitter according to any one of claims 16 to 21.
23. An envelope feedback transmitter including a power amplifier providing an output signal;
- means for controlling the envelope of the output signal; and
 - compensation means for compensating for non-linear characteristics of the envelope control means.
24. An envelope feedback transmitter according to claim 23, wherein the power amplifier has a voltage supply and the envelope control means comprises a modulator for modulating the voltage supply.
25. An envelope feedback transmitter according to claim 23, wherein the power amplifier has a bias control input, the feedback transmitter further comprising means for providing a difference signal representative of the difference between input and output envelope components, wherein the difference signal is connected to the bias control input of the power amplifier to provide the envelope control means.
26. An envelope feedback transmitter according to claim 25, wherein the difference signal is connected

to the bias control input of the power amplifier via a loop filter.

27. An envelope feedback transmitter according to any one of claims 23 to 26, wherein the difference signal providing means comprises a comparator arranged to receive signals from first and second envelope detectors for detecting the input and output envelope components respectively.
28. An envelope feedback transmitter according to claim 27, wherein the compensation means is disposed between the output of the amplifier and the input to the comparator.
29. An envelope feedback transmitter according to claim 28, wherein the compensation means comprises first and second compensation elements, the first compensation element being disposed between the first envelope detector and a first input to the comparator and the second compensation element being disposed between the second envelope detector and a second input to the comparator.
30. An envelope feedback transmitter according to claim 29, wherein the first and second compensation elements have a large signal transfer function which approximates to the inverse of the large signal transfer function of the envelope control means.
31. An envelope feedback transmitter according to claim 27, wherein the compensation means is disposed between the output of the comparator and the envelope control means.
32. An envelope feedback transmitter according to claim 31, wherein the compensation element has a linear transfer function with variable gain and a non-linear gain control.
33. An envelope feedback transmitter according to claim 32, wherein the non-linear gain control is connected to either one of the first and second envelope detectors.
34. An envelope feedback transmitter according to any one of claims 23 to 33, further comprising a phase feedback loop.
35. A portable communications device including an envelope feedback transmitter according to any one of claims 23 to 34.
36. A feedback transmitter having means for providing a difference signal representative of the difference between input and feedback signals, comprising a detector configured to detect a loss of feedback control when the difference signal exceeds a pre-

determined threshold.

37. A feedback transmitter according to claim 36 comprising an envelope elimination and restoration transmitter, in which the detector comprises an amplitude detector configured to detect a loss of feedback control when the amplitude of the envelope error exceeds a predetermined threshold.
38. A feedback transmitter according to claim 37, further comprising:
 - a power amplifier for amplifying an input signal having input phase and envelope components to produce an output signal having output phase and envelope components;
 - an envelope loop including elements configured to produce an envelope difference signal representative of the difference between the input and output envelope components, wherein the amplitude detector is configured to monitor the difference signal.
39. A feedback transmitter according to claim 37 or 38, further comprising a comparator for producing the difference signal, the comparator being configured to receive output signals from first and second envelope detectors.
40. A feedback transmitter according to claim 36, comprising a Cartesian transmitter in which the difference signal is representative of the difference between in-phase I input and feedback signals or quaternary Q input and feedback signals.
41. A portable communications device including a feedback transmitter according to any one of claims 36 to 40.
42. A method of detecting a loss of loop control in a feedback transmitter providing a difference signal representative of the difference between input and output signal components, comprising monitoring the difference signal and detecting a difference signal deviation greater than a predefined threshold.
43. A method according to claim 42, wherein the input and output signal components comprise signal envelope components.
44. A method according to claim 43, wherein the step of detecting a difference signal deviation comprises detecting a difference signal amplitude greater than a predefined threshold.
45. A method according to claim 43 or 44, further including averaging the difference signal.

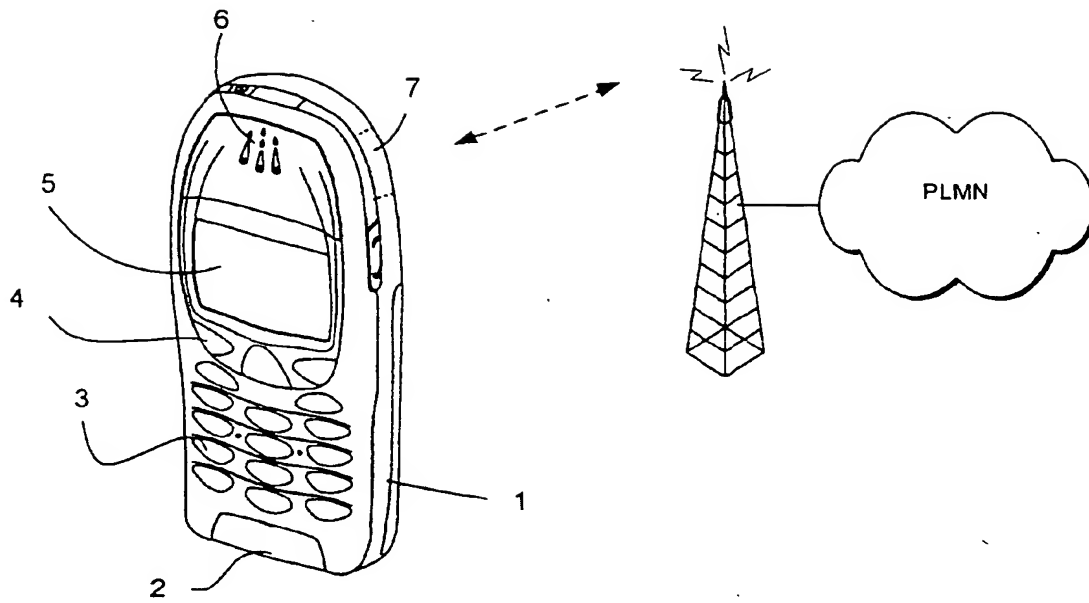


Figure 1

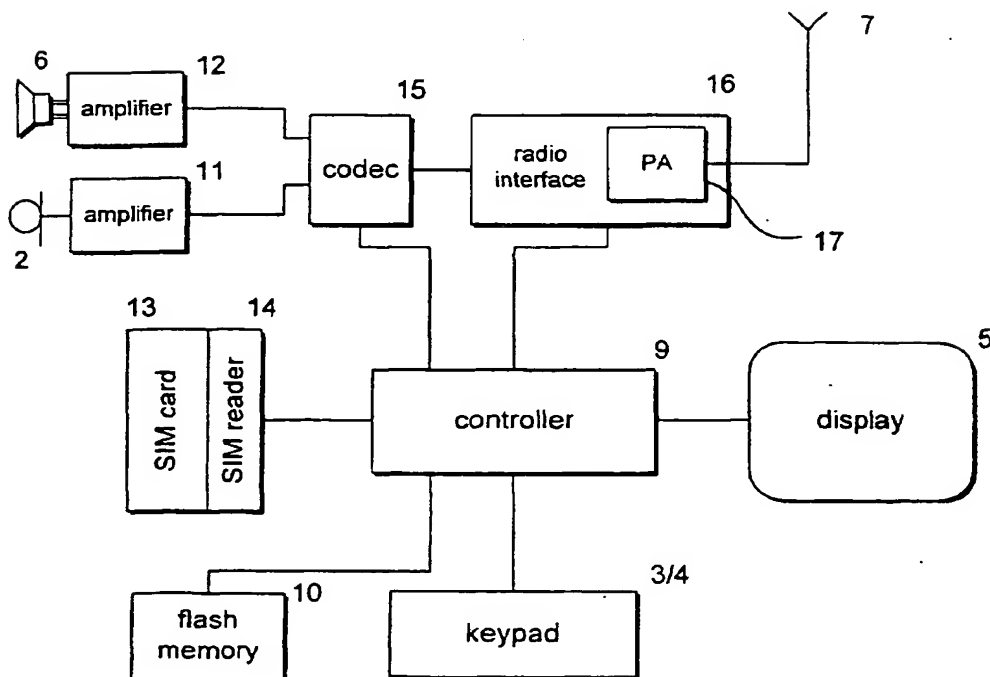


Figure 2

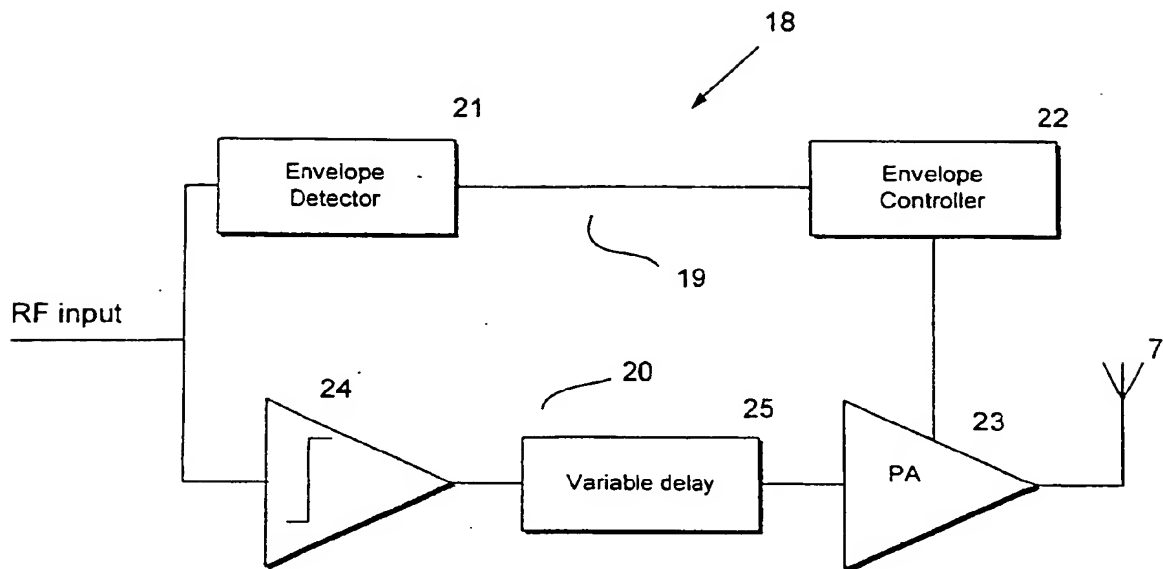


Figure 3

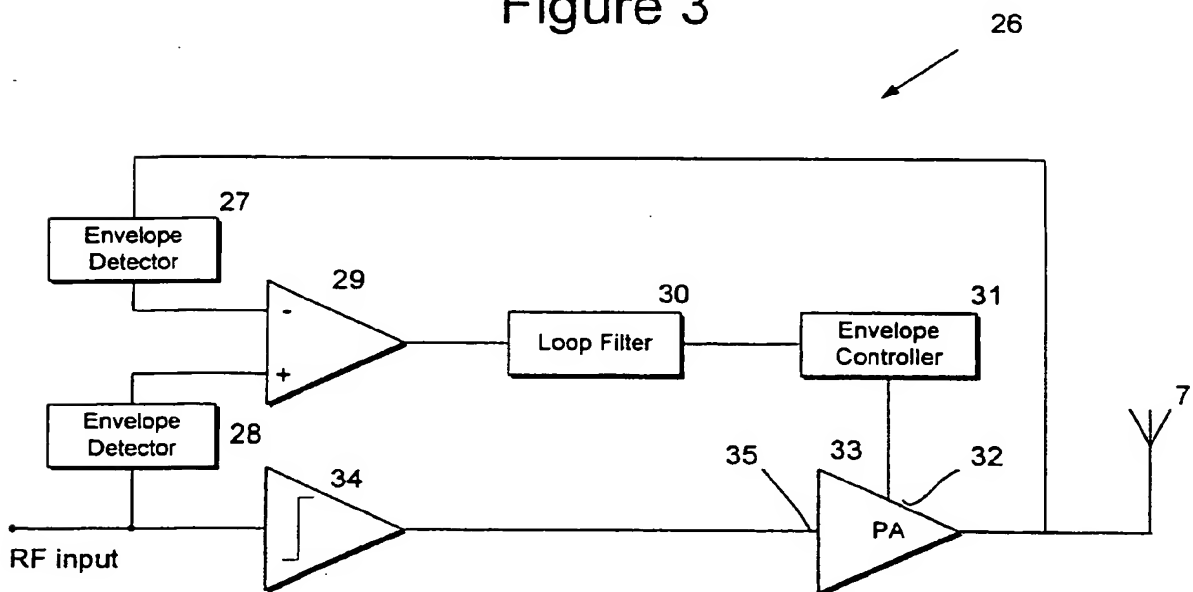


Figure 4

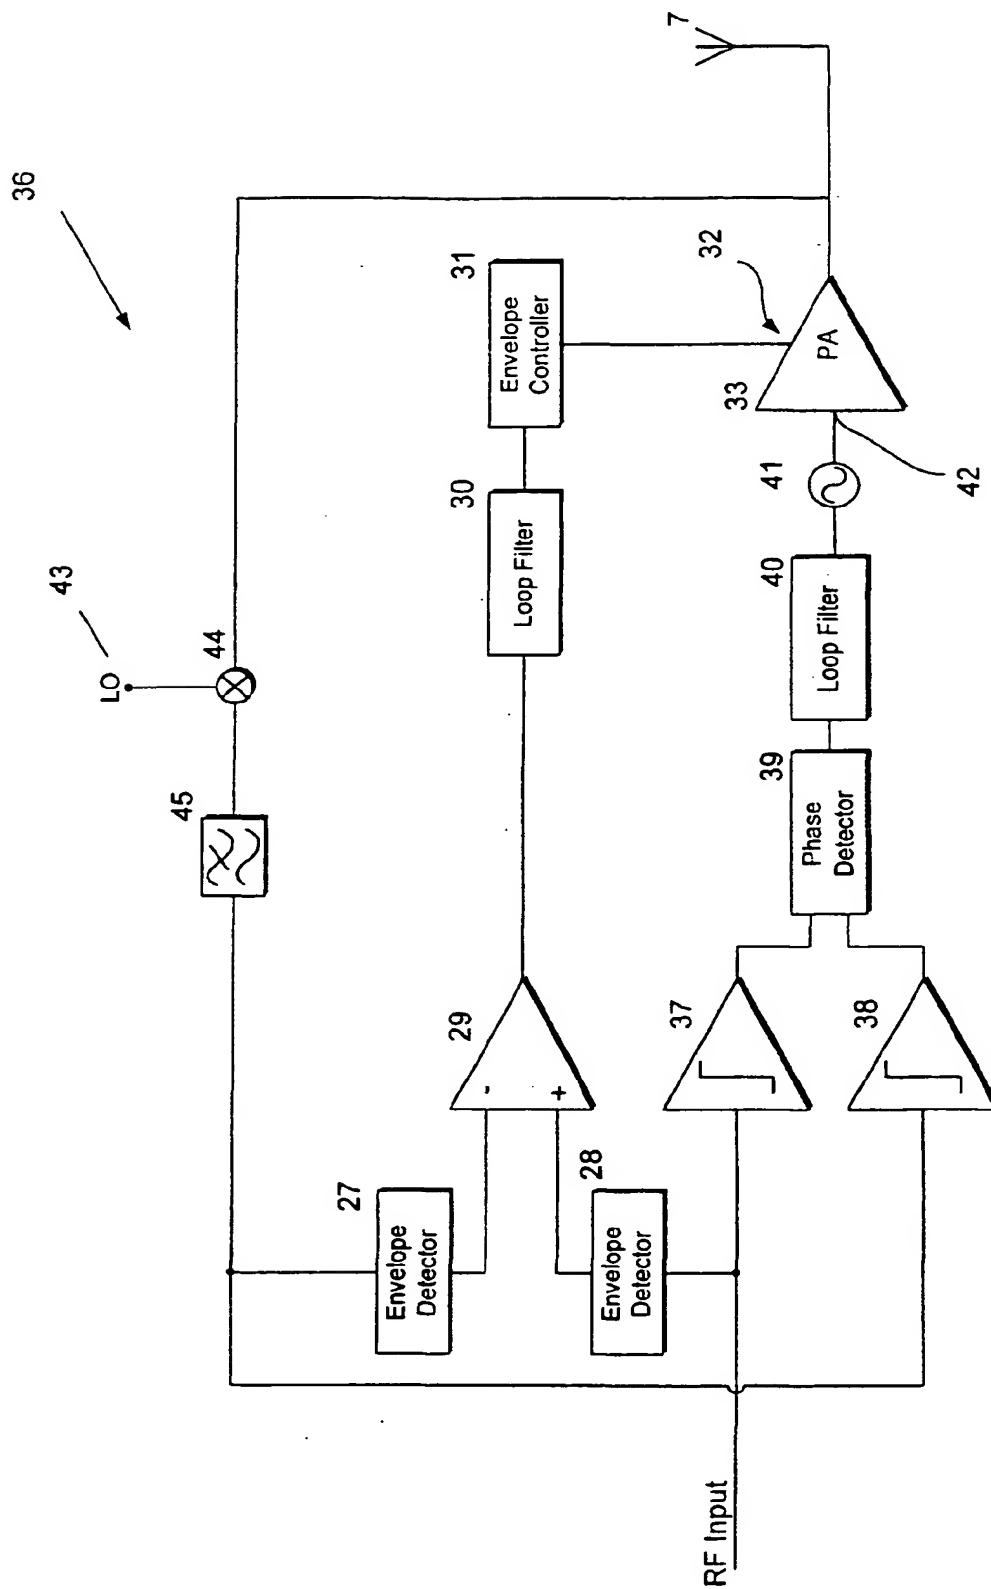


Figure 5

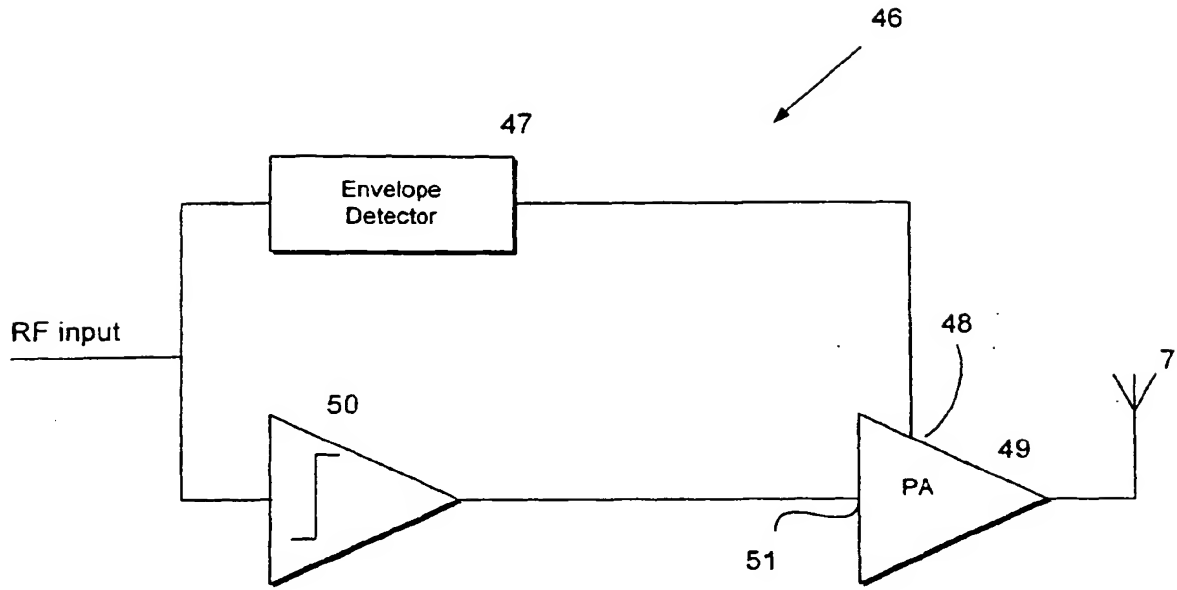


Figure 6

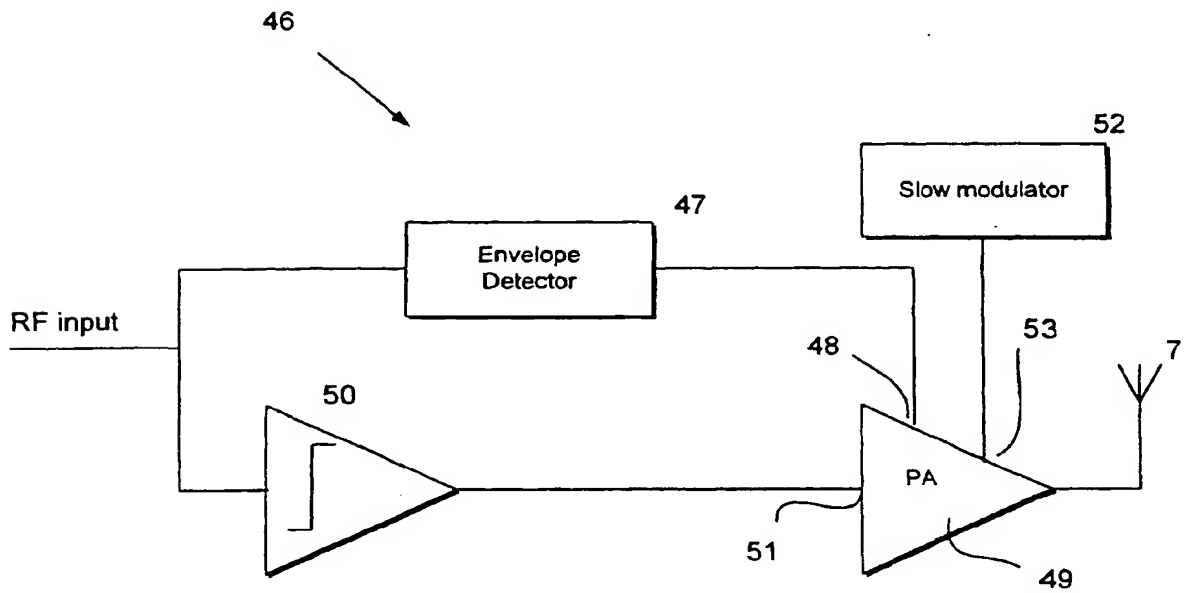


Figure 7

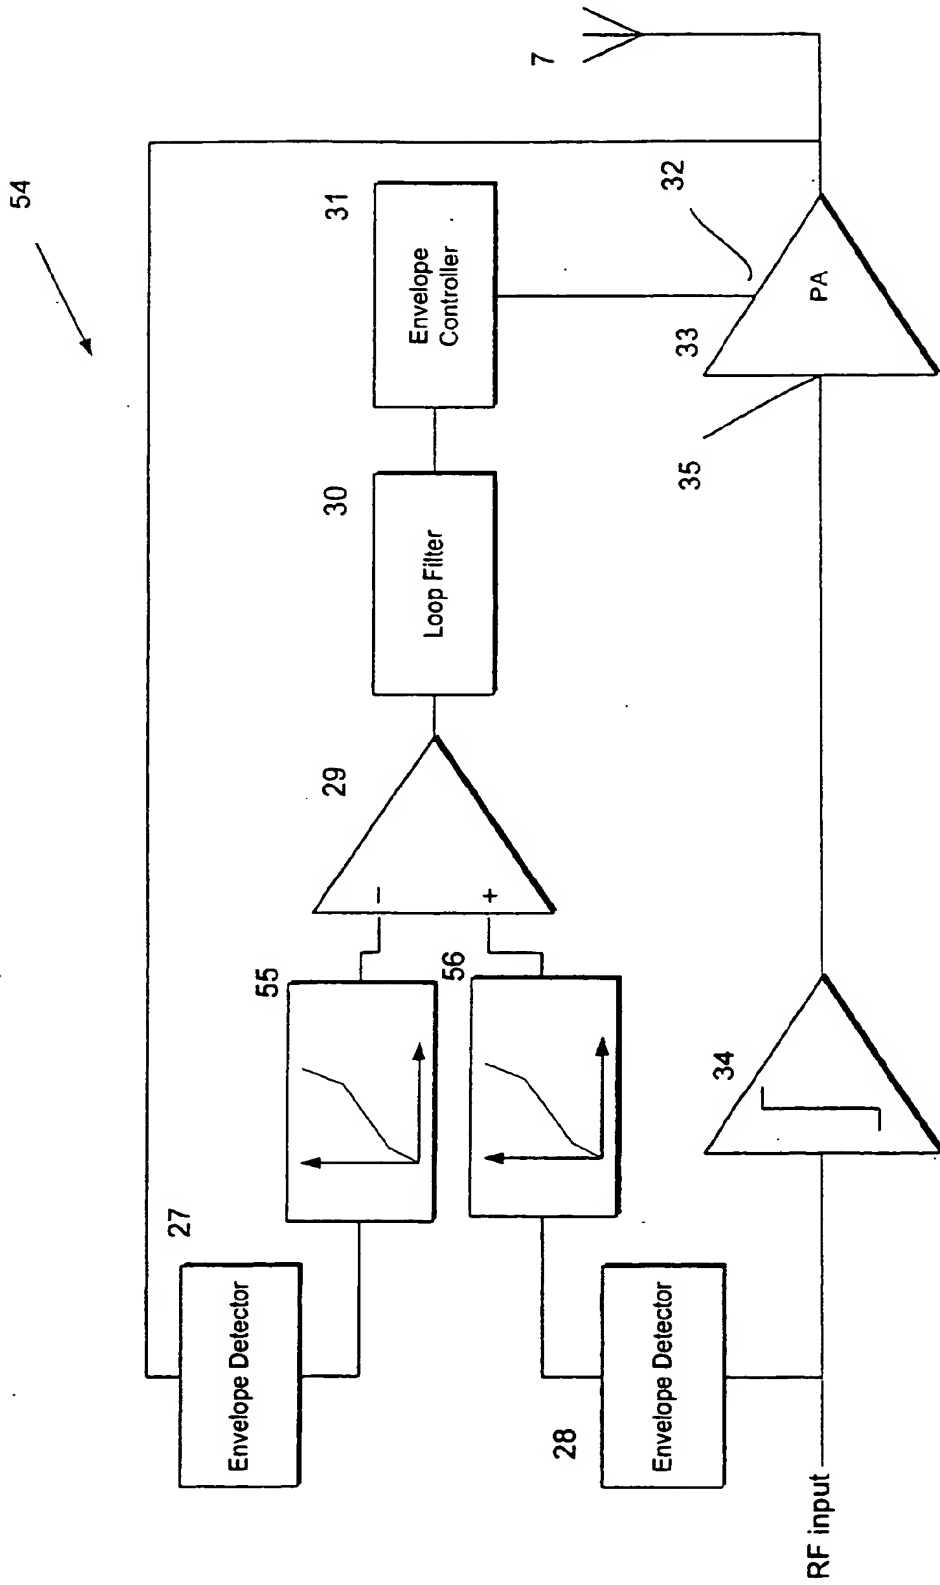


Figure 8

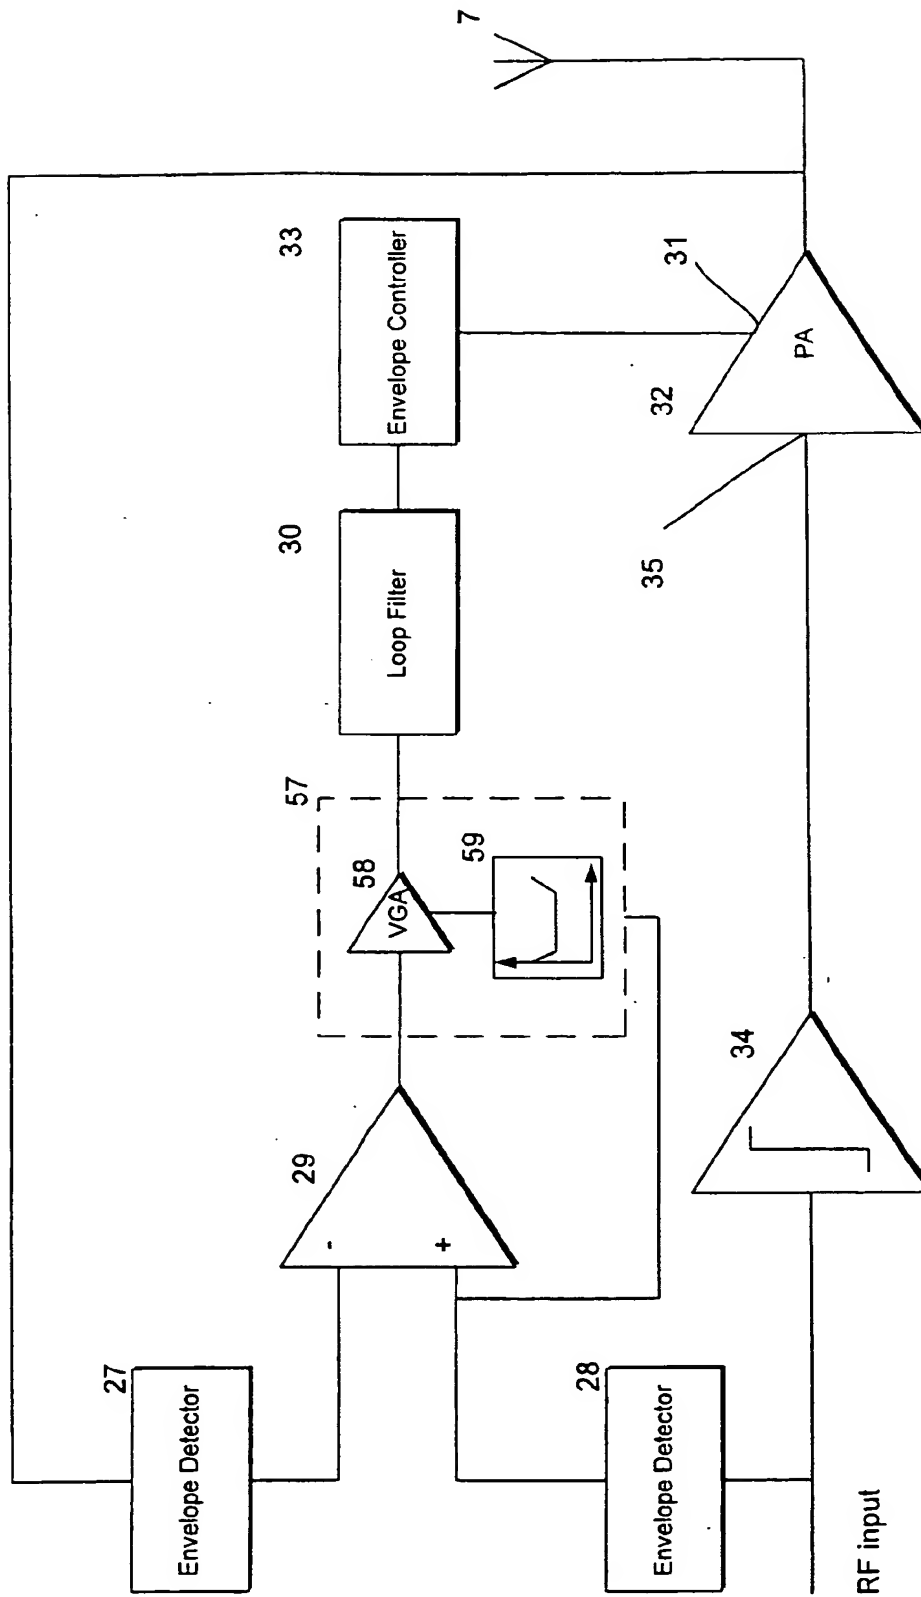


Figure 9

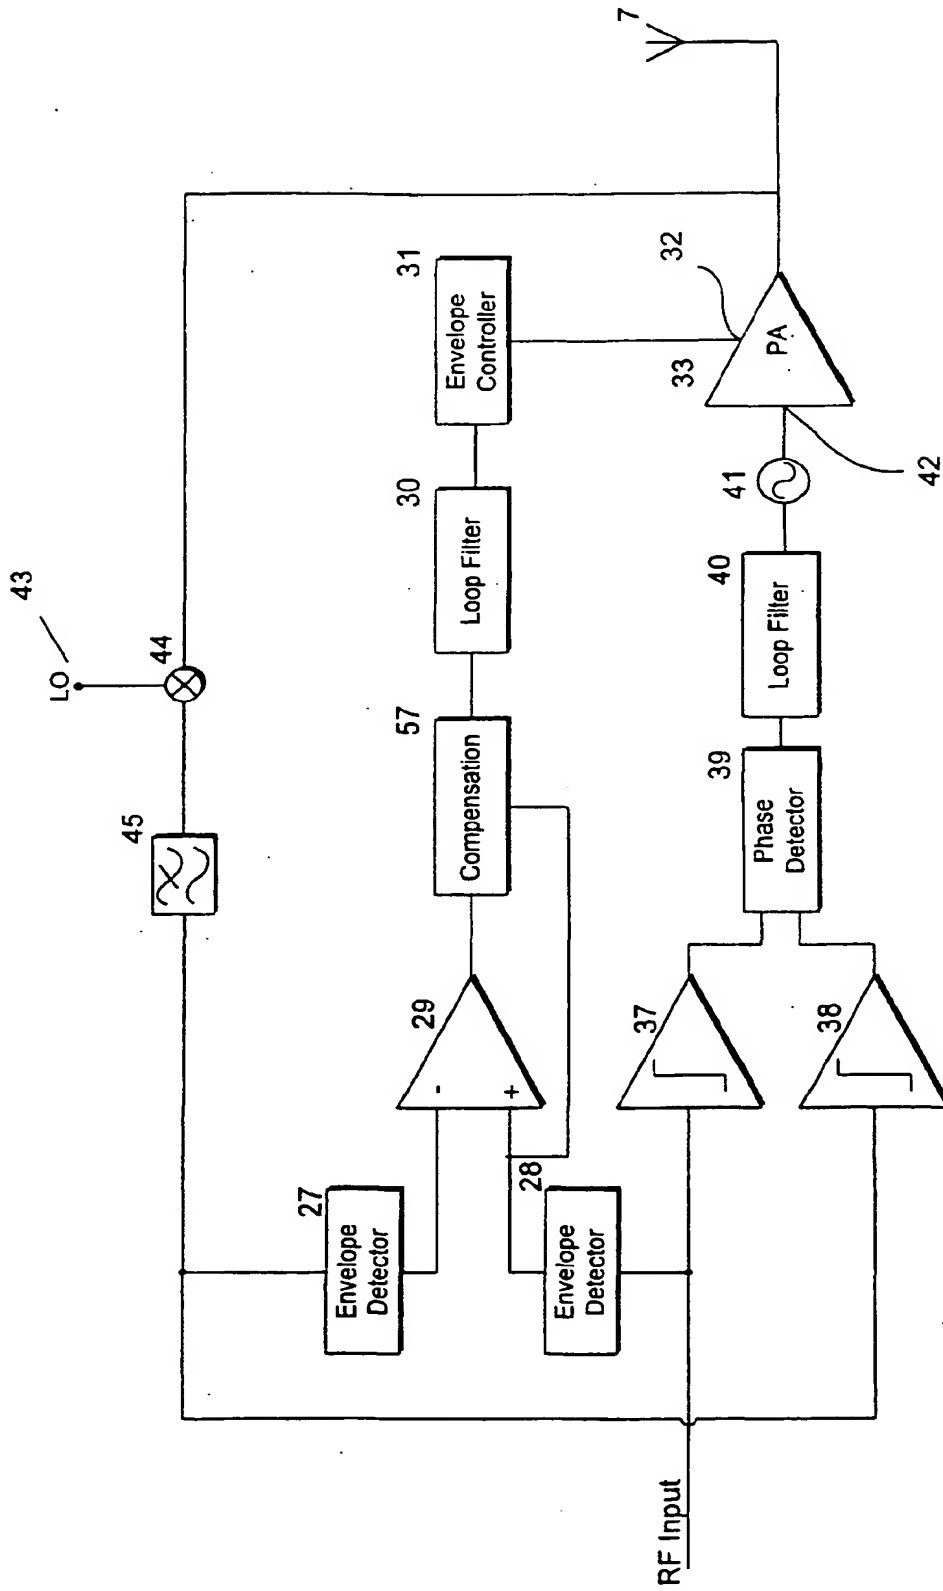


Figure 10

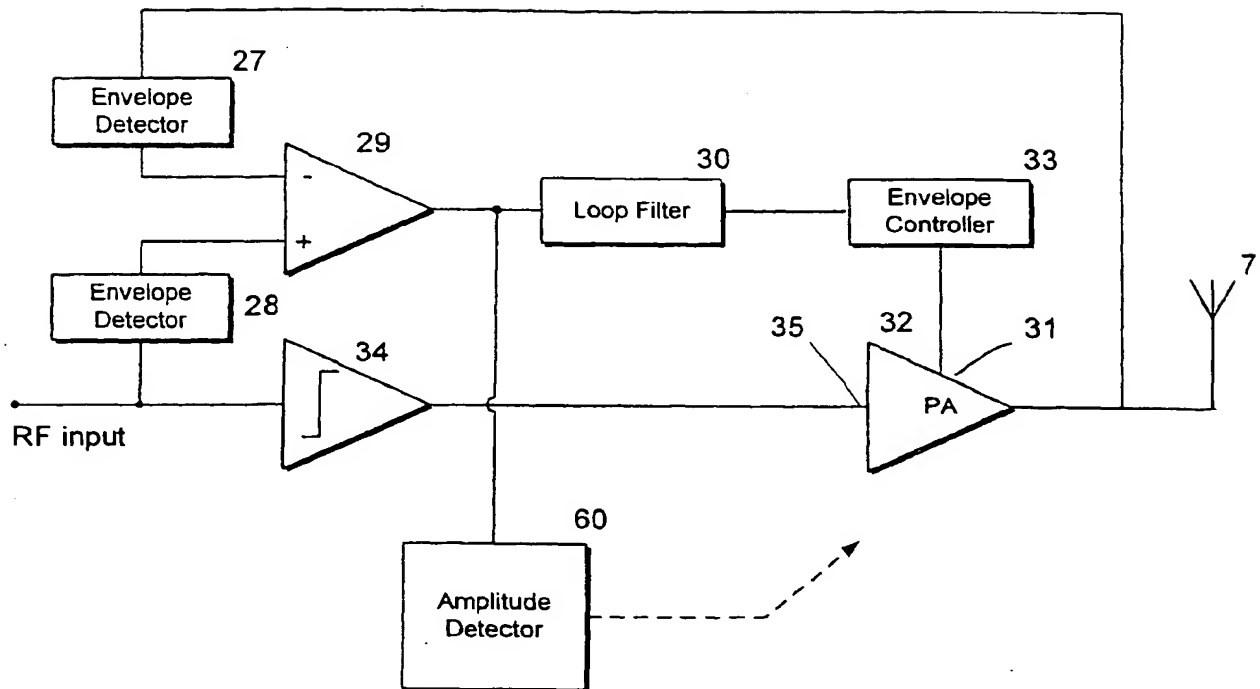


Figure 11

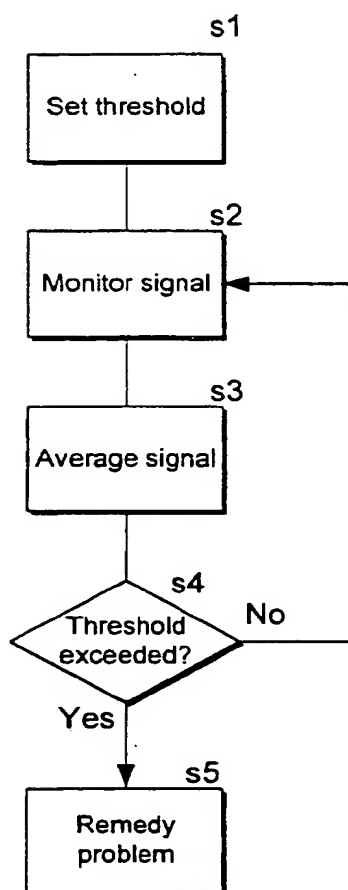


Figure 12



(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
02.07.2003 Bulletin 2003/27

(51) Int Cl.7: **H03F 1/32, H03F 1/02**

(43) Date of publication A2:
24.07.2002 Bulletin 2002/30

(21) Application number: **01310612.5**

(22) Date of filing: **19.12.2001**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
 Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
 • **Midtgaard, Jacob**
3480 Fredensborg (DK)
 • **Bagger, Oluf**
1722 Copenhagen V (DK)

(30) Priority: **22.12.2000 GB 0031550**

(74) Representative: **Walaski, Jan Filip et al**
Venner, Shipley & Co,
20 Little Britain
London EC1A 7DH (GB)

(71) Applicant: **Nokia Corporation**
02150 Espoo (FI)

(54) **Transmitter circuits**

(57) A polar loop transmitter includes separate phase and envelope paths providing a linearising scheme for an efficient non-linear power amplifier. Loop filters are included in each of the phase and envelope paths to enable the path characteristics to be matched to one another. A polar loop transmitter and other types of envelope elimination and restoration transmitters control the output envelope of the power amplifier by

connecting the output of the envelope detector, or in an envelope feedback transmitter, the envelope error signal, to the bias control input of the power amplifier. The transmitter can further include compensation means for compensating for non-linearities in the envelope control means and a loss of feedback control detector to ensure that the feedback signal remains within acceptable limits.

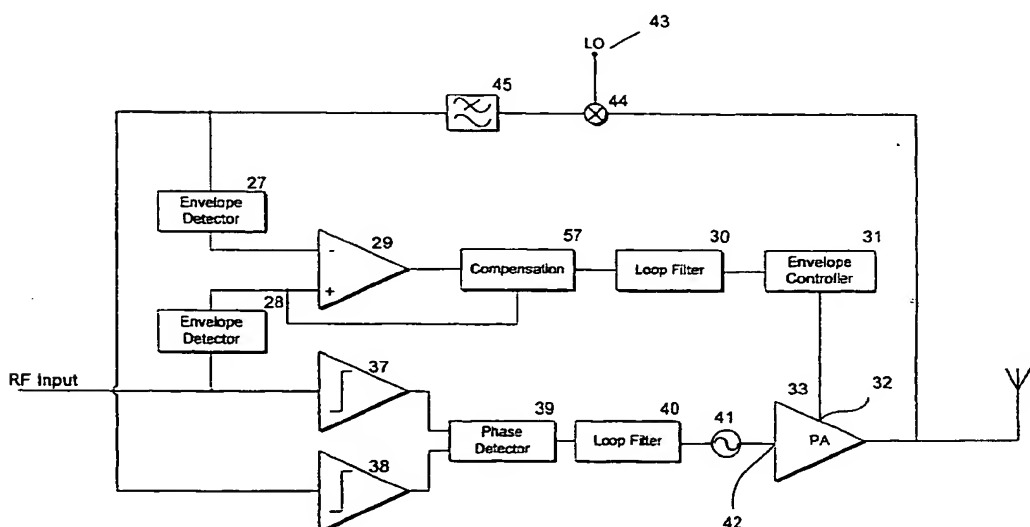


Figure 10



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 31 0612

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 6 043 707 A (BUDNIK BRIAN JOSEPH) 28 March 2000 (2000-03-28) * column 1, line 35 - column 8, line 9; figures 1,2,8,9 *	1,5-25, 27-31, 34,35	H03F1/32 H03F1/02
Y		2-4,26, 32,33, 36-45	
Y	US 5 742 201 A (BASKIN BRIAN L ET AL) 21 April 1998 (1998-04-21) * column 8, line 28 - column 15, line 42; figures 4,21 *	2-4,26	
Y	US 5 675 288 A (AZZARA JEAN-CLAUDE ET AL) 7 October 1997 (1997-10-07) * column 2, line 22 - column 3, line 21; figure 1 * * column 7, line 26-62; figure 4 *	32,33	
Y	EP 0 431 201 A (NIPPON TELEGRAPH & TELEPHONE) 12 June 1991 (1991-06-12) * page 13, line 51-58; figure 38 *	36-45	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H03F
A	EP 0 705 010 A (NIPPON ELECTRIC CO) 3 April 1996 (1996-04-03) * column 6, line 25 - column 11, line 34; figures 5,6 *	2-4,26	
A	US 5 905 760 A (SCHNABL GOTTFRIED ET AL) 18 May 1999 (1999-05-18) * column 7, line 64 - column 9, line 49; figure 9 *	36-45	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 8 May 2003	Examiner Fedi, G
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 31 0612

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-05-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6043707 A	28-03-2000	AU 2368000 A WO 0041296 A1	24-07-2000 13-07-2000
US 5742201 A	21-04-1998	EP 0878053 A1 JP 3343260 B2 JP 2000507751 T WO 9728598 A1 US RE37407 E1	18-11-1998 11-11-2002 20-06-2000 07-08-1997 16-10-2001
US 5675288 A	07-10-1997	FR 2722350 A1	12-01-1996
EP 0431201 A	12-06-1991	JP 1925789 C JP 3222524 A JP 6056960 B JP 3034709 A JP 3104422 A JP 6054877 B CA 2035455 A1 DE 69024182 D1 DE 69024182 T2 EP 0431201 A1 WO 9100653 A1 US 5251330 A JP 2689011 B2 JP 3276912 A JP 3174810 A	25-04-1995 01-10-1991 27-07-1994 14-02-1991 01-05-1991 20-07-1994 31-12-1990 25-01-1996 31-10-1996 12-06-1991 10-01-1991 05-10-1993 10-12-1997 09-12-1991 30-07-1991
EP 0705010 A	03-04-1996	JP 2964883 B2 JP 8102767 A AU 689309 B2 AU 3294395 A CN 1128924 A ,B DE 69519839 D1 DE 69519839 T2 DE 705010 T1 EP 0705010 A1 US 5553318 A	18-10-1999 16-04-1996 26-03-1998 18-04-1996 14-08-1996 15-02-2001 02-08-2001 29-08-1996 03-04-1996 03-09-1996
US 5905760 A	18-05-1999	FR 2746563 A1 AT 212160 T AU 1637197 A CA 2200660 A1 DE 69709560 D1 DE 69709560 T2 EP 0797293 A1 JP 10013160 A	26-09-1997 15-02-2002 25-09-1997 22-09-1997 21-02-2002 29-08-2002 24-09-1997 16-01-1998

EPO FORM P0450

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82